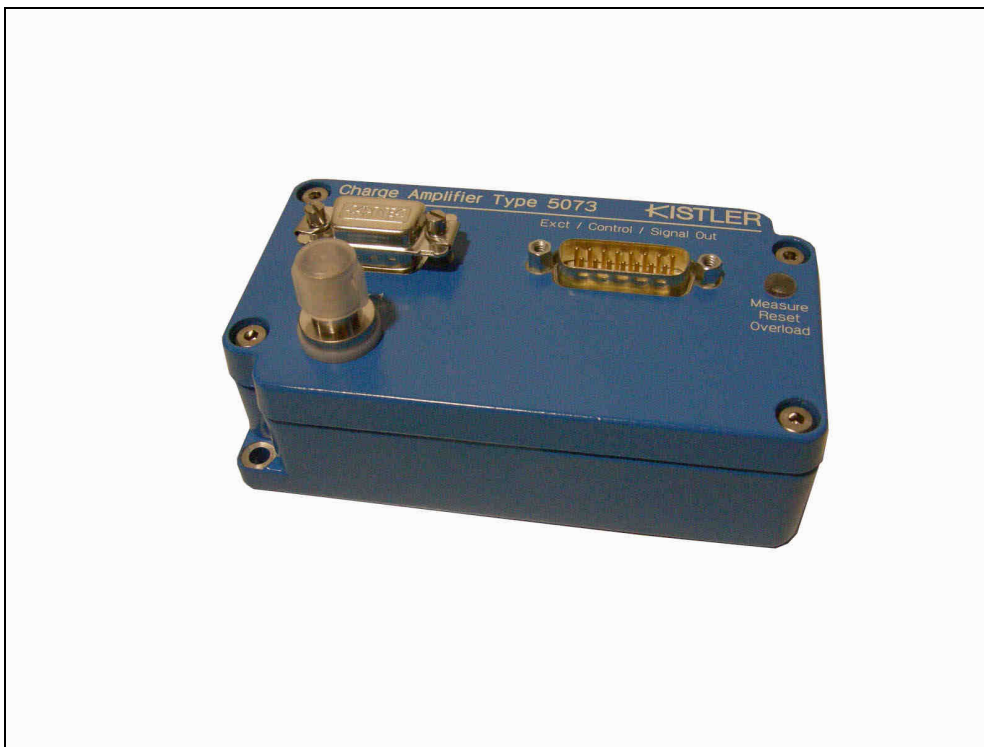


I - 24123 Bergamo cap. soc. € 45'000 i.v. www.adengin.it
via Raboni 21/C R.E.A. BG N. 321066 adeng@bisnet.it
tel +39 035 361 061 Reg. Imp. N.16731/00
fax +39 035 361 829 VAT IT 02762570162

1098	ADK 5073	Industrial load cell charge amplifier , gain selectable via software
------	----------	--

**Technical features :**

- Charge Amplifier
- Design Stand-alone for Industrial Application
- Number of channels 1
- Connector at input end BNC neg.
- Measuring range pC 100 to 1000000
- Output signal/voltage V -10.0 +10.0
- Frequency response kHz 0.0 to 20.0
- Operating temperature range °C 0 to 60
- Max. output current mA ± 5
- Output impedance Ω 10
- Output voltage limitation V $> \pm 11$
- Error % Meas. range $< \pm 0,5$
- Zero point deviation mV $< \pm 30$
- Supply voltage 18 to 30 VDC
- Plug connector BNC IP60
- Length mm 115.0
- Width mm 64.0
- Height mm 53.0
- No Drift compensation
- Weight kg 0.320
- Case material die-cast aluminum